

FLEX-LAG Potahy bubnů



Min průměr bubnu v mm	Druh potahu	Počet pásků
50-67	6BLD/6WLD	1
68-129		2
130-196		3
197-259	6BLD/6WLD/10ND/12ND/10FRD/ /12FRD/12NDC/12FRD	4
260-319		5
320-381	6BLD/6WLD/10ND-20ND/ 10FRD-20FRD/12NDC/ 12FRDC/CL/CLFR	6
382-445		7
446-510		8
511-573		9
574-636		10
637-700		11
701-764		12
765-827		13
828-891		14
892-955		15
956-1018		16
1019-1082		17
1083-1145		18
1146-1210		19
1211-1300		20

Lepení




ND
FRD



6BLD
6WLD



12NDC
12FRDC

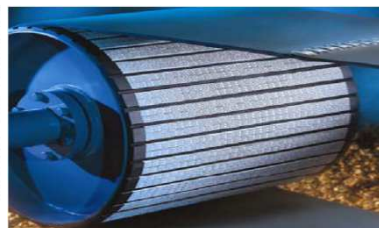

CL
FRCL

Svařování

Min průměr bubnu v mm	Druh potahu	Počet pásků
400	FLEX-Lag Weld-On FRAS-FLEX-Lag Weld-On	8
450		9
500		10
600		12
750		15
900		18
1050		21
1200		24
1350		27
1500		30
1800		36

